


Advice: Horizontal mounting position.
Light sensor on top.
Wind monitor below.

- Install the Ventero horizontally near the sun protection device (see Figure) in a position that is not sheltered from sunlight or wind.
- The Ventero includes the sensor technology for the AeroTec device from elero (without AeroTec it will not function)

Connection

1. Connect the Ventero as follows:

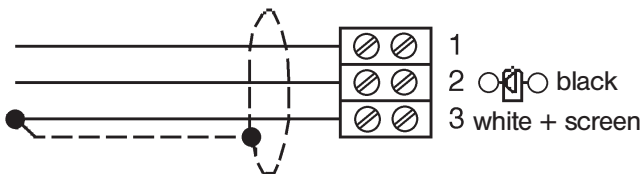

Advice:

The connecting cables to the light sensor and to the wind monitor should always be shielded. Either a separated 2-wire cable or 4-wire joint cable, e.g. Siemens MSR control LSYCY, or a telephone cable JY-ST-Y 2 x 2 x 0,6 should be used.


- Screw the lid.
- Adjust the position.
- Tighten the screw ①.

Technical data


Temperature range	-25 °C to +60 °C
Mast support	∅ 60-80 mm (optional accessory)
Protection class	IP 43

Ventero mounting options

The wall bracket can be swivelled between -5° and 180°. Secure the required position once it has been set (the screw ①).



Wall brackets rotated by 90°, top cover

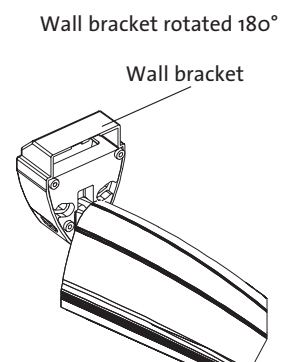

Ventero mast and corner support (optional accessory)

